

# T11 2,500 LITRE




Offshore Portable Tank (-40°C)



2,500 LITRE



A Marmon/Berkshire Hathaway Company

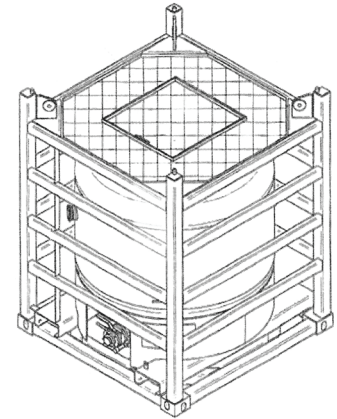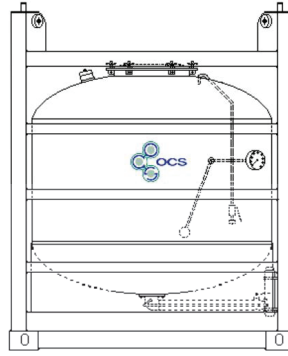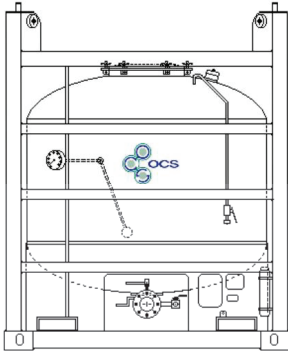

# T11 2,500 LITRE

## Offshore Portable Tank (-40°C)

### General Specification

<b>Dimensions</b>	<b>mm</b>	<b>ft-in</b>	<b>Frame</b>		<b>Steam Heating</b>	None
Length	1,795	5' 10"	Forklift Pockets	Loaded lift fork pockets – 280mm x 112mm, 1155mm centres.	<b>Approvals</b>	T11 UN Portable tank (covering IMDG, ADR/ RID, CFR) DNV2.7-1, BS EN12079.
Width	1,795	5' 10"	Lifting Lugs	Fitted with lifting sling and shackles to DNV 2.7-1.		
Height	2,364	7' 9"	<b>Fittings</b>			
<b>Capacity</b>	<b>Litres</b>	<b>Gallons</b>	<b>US Gallons</b>	<b>Manlid</b>		
	2,500	550	660	Perolo ND500mm, hinged with 6 point fastenings.		
<b>Shell Material</b>	EN 10028-7 (316L) SA240 Stainless Steel			<b>Airlines</b>		
<b>Pressures</b>	Working = 4.0 Bar (58.0 psi) Test = 6.0 Bar (87.0 psi) Vacuum = 0.4 Bar (5.8 psi)			<b>Bottom Outlet</b>		
<b>Design Temp</b>	-40°C to +50°C			Flange ND50 Footvalve Perolo, 2" Ball Valve, 2" BSPP male connection with retained dustcap. 1" BSPP male sample point, ball valve and retained dustcap.		
<b>Design Code</b>	ASME VIII Division 1			<b>Safety Relief Valve</b>		
<b>Weights</b>	<b>kgs</b>			Perolo ND65, Pressure 4.4 Bar / 63.8psi		
Tare	1,400 nominal			<b>Level Gauge</b>		
Max. Payload	5,100 nominal			Magnetel Rochester, St Steel type 6339.		
Max. Gross	6,500					

Note: The above information is an average representation of technical data. Please consult your OCS representative for more specific data.



Visit our website [www.exsif-ocs.com](http://www.exsif-ocs.com)

EXSIF OCS Limited, Aberdeen. Tel: + 44 (0) 1224 894643 Contact: [info@exsif-ocs.com](mailto:info@exsif-ocs.com)