

T11 20,000 LITRE




DNV Offshore Portable Tank



20,000 LITRE



A Marmon/Berkshire Hathaway Company

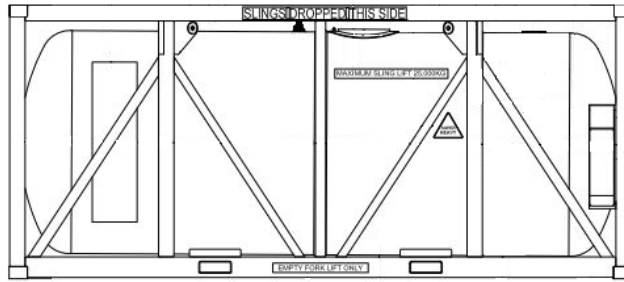

T11 20,000 LITRE

DNV Offshore Portable Tank (Cold Ambient -40 °C)

General Specification

Dimensions	mm	ft-in	Frame				
Length	6,058	20' 0"	Forklift Pockets	Empty lift fork pockets – 300mm x 100mm, 2050mm centres.	Top Inlet / Outlet	4" ASA150 tank pad c/w blind flange.	
Width	2,438	8' 0"	Lifting Lugs	Fitted with lifting sling and shackles to DNV 2.7-1.	Spare Nozzle	6" ASA 150 flanged connection at rear of tank c/w blind flange.	
Height	2,667	8' 9"	Walkway	Full deck, galvanised steel walkway with retractable stainless steel handrail.	Recirculation	4" recirculation line c/w 4" stainless steel Bray butterfly valve, fitted to rear end of tank.	
Capacity	Litres	Gallons	US Gallons		Safety Relief Valve	3" flanged Super Maxi pressure / vacuum valve set at 4.41 bar/ 0.21 bar (63.8 /3 psi) with flame gauze fitted.	
	20,000	4,400	5,283		Level Gauge	Bayham level gauge fitted to tank body in line with bottom outlet.	
Shell Material	EN 10028-7 1.4401/04 (316/316L) Stainless Steel			Fittings		Steam Heating	None
Pressures	Working = 4 Bar (58.0 psi) Test = 6 Bar (87.0 psi)			Manlid	Fort Vale 500mm, hinged with 8 point fastenings.	Approvals	T11 UN Portable tank (incorporating IMDG, ADR) TIR, CSC, DNV2.7-1, BS EN12079.
Design Temp	-40°C to +65°C			Airlines	1 ½" Fort Vale ball valve and 1 ½" NPT connection and retained dustcap.		
Design Code	ASME VIII Division 1 where applicable			Vent	1" BSP ball valve c/w pipework and dustcap to rear end on vessel.		
Weights	kgs			Bottom Outlet	Fort Vale 4" bottom outlet pad c/w 4" 45 degree cleanflow footvalve, 4" butterfly valve, 4" NPT connection with retained dustcap.		
Tare	5,360				Remote closure assembly fitted.		
Offshore Max. Gross	25,000						
Onshore Max. Gross	34,000						

Note: The above information is an average representation of technical data. Please consult your OCS representative for more specific data.



Visit our website www.exsif-ocs.com

EXSIF OCS Limited, Aberdeen. Tel: + 44 (0) 1224 894643 Contact: info@exsif-ocs.com