

T11 7,500 LITRE



Offshore Portable Tank



7,500 LITRE



A Marmon/Berkshire Hathaway Company

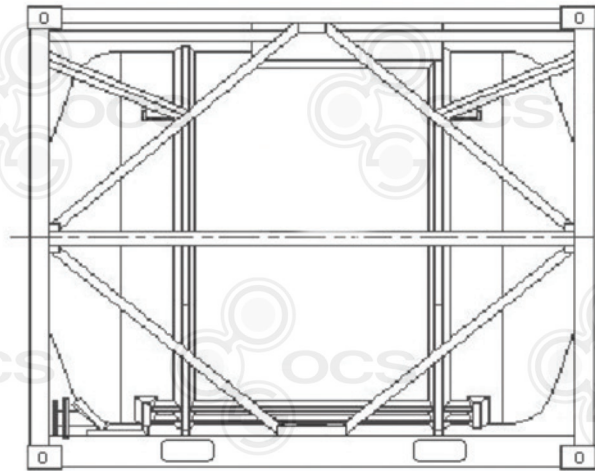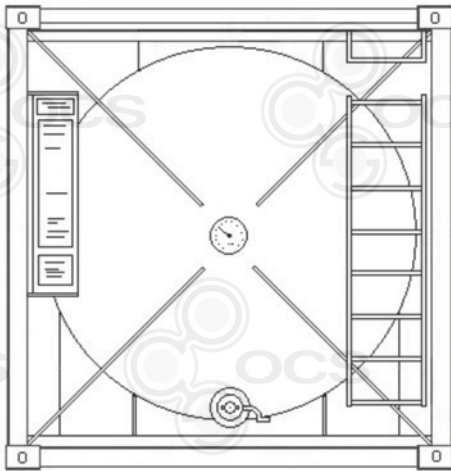

T11 7,500 LITRE

Offshore Portable Tank (-20 °C) or (-40 °C)

General Specification

Dimensions	mm	ft-in	Frame			
Length	2,991	9' 10"	Forklift Pockets	Loaded lift fork pockets – 300mm x 100mm, 1500mm centres.		
Width	2,438	8' 0"	Lifting Lugs	Fitted with lifting sling and shackles to DNV 2.7-1.		
Height	2,438	8' 0"	Fittings			
Capacity	Litres	Gallons	US Gallons	Manlid	Fort Vale 500mm, hinged with 8 point fastenings.	Steam Heating
	7,567	1,665	2,000	Airlines	1" BSP top mounted ball valve leading to secondary ball valve operable from ground level and c/w 1" BSP end connector and retained dustcap.	4 run steam heating system.
Shell Material	EN 10028-7 1.4401/04 (316/316L) Stainless Steel			Vent	Top positioned 1 ½" BSP Fort Vale ball valve c/w provision for pressure gauge, with retained dust cap.	Pressures
Pressures	Working = 4.0 Bar (58.0 psi) Test = 6.0 Bar (87.0 psi) Vacuum = 0.4 Bar (5.8 psi)			Bottom Outlet	Fort Vale 3" NB Fort Vale 45 degrees footvalve, 3" butterfly valve, 3" BSP connection and retained dustcap. Remote closure system fitted.	Connections
Design Temp	-20°C to +130°C or -40°C to +130°C			Safety Relief Valve	2 ½" BSP Super Maxi pressure / vacuum valve set at 4.4 bar/ 0.21 bar (63.8 /3 psi) with flame gauze fitted.	Approvals
Design Code	ASME VIII Division 1 where applicable			Level Gauge	Bayham level gauge fitted to tank body in line with bottom outlet.	UN Portable tank (T11) IMDG, ADR/RID, DNV2.7-1(2013), BS EN12079, CFR, UIC, TIR, CSC.
Weights	kgs					
Tare	2,250					
Max. Payload	10,750					
Max. Gross	13,000					

Note: The above information is an average representation of technical data. Please consult your OCS representative for more specific data.



Visit our website www.exsif-ocs.com

EXSIF OCS Limited, Aberdeen / Gt. Yarmouth: + 44 (0) 1224 976000 Contact: info@exsif-ocs.com